




2 Rollers

series Impact

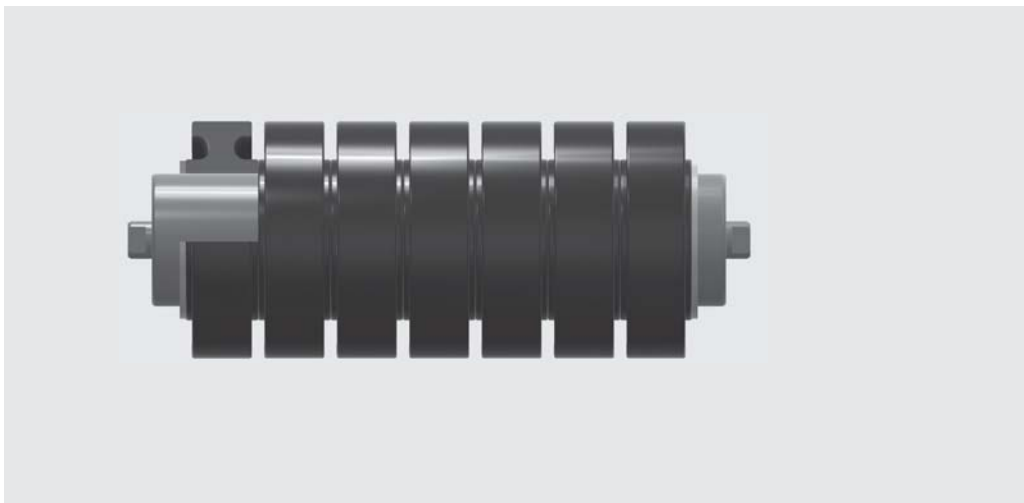

Øe 133 NA

Base roller:

PSV/1-FHD

D = 89;
spindle 20; d₁ = 20
bearing 6204
ch = 14

PSV/4-FHD

D = 89;
spindle 30; d₁ = 30
bearing 6206
ch = 22

PSV/2-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6205
ch = 18

PSV/5-FHD

D = 89 x 4*;
spindle 30; d₁ = 30
bearing 6306
ch = 22


PSV/3-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6305
ch = 18

* biggertubethickness
than standard

Example of ordering
standard design
PSV/2-FHD,25F,133NA,388

for special designs
see pages 80-81

belt width mm	roller dimensions mm					weight Kg					rings width	
	arrangements 			B	C	A	PSV/1-FHD	PSV/2-FHD	PSV/3-FHD	PSV/4-FHD		PSV/5-FHD
	500			200	208	*	3.7					E = 35
	650			250	258	*	4.5 5.1					
	500	800		315	323	*	5.6	6.2	6.5	7.3	7.9	
	650	1000		380	388	*	6.6	7.3	7.7	8.5	9.1	
	800	1200		465	473	*	7.8	8.6	8.9	9.9	10.5	
	1400			530	538	*	8.8	9.7	10.1	11.2	11.8	
	500	1000	1600	600	608	*	10.1	11.1	11.4	12.7	13.3	
	1800			670	678	*		12.2	12.6	13.9	14.5	
	1200			700	708	*	11.4	12.6	12.9	14.3	14.9	
	650	2000		750	758	*	12.3	13.5	13.9	15.3	15.9	
	1400			800	808	*	12.9	14.2	14.6	16.2	16.4	
	1600			900	908	*	14.5	15.9	16.3	18.0	18.6	
	800			950	958	*	14.6	17.1	17.5	19.3	19.9	
	1800			1000	1008	*		18.2	18.4	20.1	20.7	
	2000			1100	1108	*			19.8	21.7	22.3	
	1000			1150	1158	*	18.7	20.5	20.8	23.0	23.6	
	1200			1400	1408	*	22.4	24.6	24.9	27.5	28.1	
	1400			1600	1608	*	25.5	27.9	28.3	31.2	31.8	
	1600			1800	1808	*	28.0	30.7	31.0	34.3	34.9	
	1800			2000	2008	*		34.0	34.4	38.0	38.6	
	2000			2200	2208	*			37.5	41.5	42.1	

* in relation to the choice of base roller