




## 2 Rollers

### series Impact

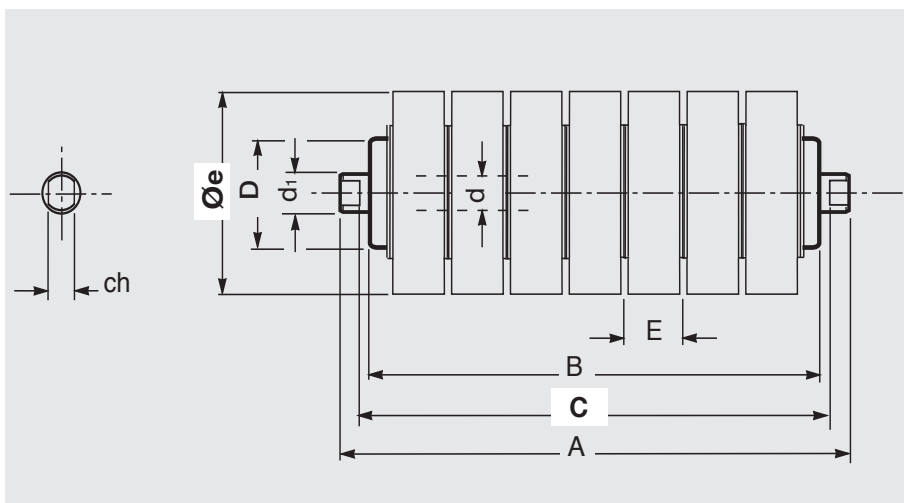

## Øe 215 NA

Base roller:

### PSV/5-FHD

D = 133;  
spindle 30; d<sub>1</sub> = 30  
bearing 6306  
ch = 22

### PSV/7-FHD

D = 133x 6\*;  
spindle 40; d<sub>1</sub> = 40  
bearing 6308  
ch = 32

\* bigger tube  
thickness than  
standard

belt	roller						
	width mm	dimensions mm			weight Kg		rings width
arrangements	B	C	A	PSV/5-FHD	PSV/7-FHD	E = 50	
	1800	670	678	702	27.6	32.6	
	2000	750	758	782	31.0	36.4	
	2200	800	808	832	32.9	38.5	
	2400	900	908	932	36.7	42.7	
	2600	950	958	982	38.6	44.8	
	1800	1000	1008	1032	40.4	46.9	
	2800	1050	1058	1082	42.3	49.0	
	2000	1100	1108	1132	44.2	51.1	
	3000	1120	1128	1152	44.6	51.6	
	2200	1250	1258	1282	49.9	57.5	
	2400	1400	1408	1432	55.6	63.8	
	2600	1500	1508	1532	59.4	68.0	
	2800	1600	1608	1632	63.2	72.2	
	1800	2000	2008	2032	78.3	89.1	
	2000	2200	2208	2232	85.9	97.5	
	2200	2500	2508	2532	97.3	110.2	
	2400	2800	2808	2832	108.6	122.8	
	2600	3000	3008	3032	116.2	131.3	
	2800	3150	3158	3182	121.9	137.6	

Example of ordering  
standard design  
PSV/7-FHD,40F,215NA,758

for special designs  
see pages 80-81