

Øe 180 NM

Base roller:

PSV/1-FHD

D = 89;
spindle 20; d₁ = 20
bearing 6204
ch = 14

PSV/4-FHD


D = 89;
spindle 30; d₁ = 30
bearing 6206
ch = 22


PSV/2-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6205
ch = 18

PSV/3-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6305
ch = 18

belt	roller				weight				rings width E = 38,5	
	width mm	dimensions mm				Kg				
arrangement 	B	C	A		PSV/1-FHD	PSV/2-FHD	PSV/3-FHD	PSV/4-FHD	L	
	500	600	608	626	632	15.7	16.7		540	
	650	750	758	776	782	19.7	20.9		695	
	800	950	958	976	982	25.6	27.0		925	
	1000	1150	1158	1176	1182	30.0	31.8	32.2	34.3	1080
	1200	1400	1408	1426	1432	36.3	38.4	38.7	41.3	1385
	1400	1600	1608		1632		43.3	43.7	46.6	1540
	1600	1800	1808		1832		48.0	48.4	51.7	1770

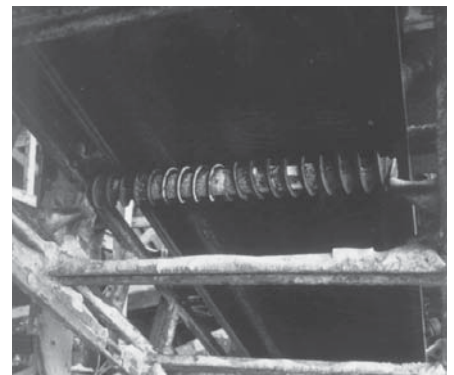

Example of ordering

standard design
PSV/1-FHD,20F,180NM,1158

for special designs
see pages 80-81