


6.3.8 Covers with hinged inspection door

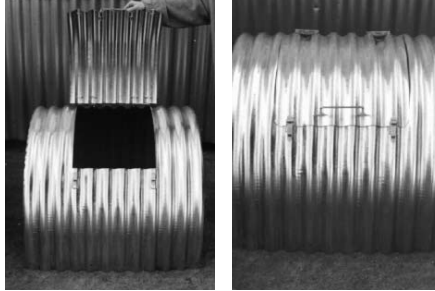

Dimensions for the opening window w. 415 x h. 540 mm or on request. The cover opening is made through a hinged inspection door with handle. The fixing is with steel hinges and fast locks. The hinges, the locks and the handle are mounted on the hinged inspection door and positioned on the side where they can be easily reachable for the operators working at the conveyor. The mounting of the hinged inspection door is done at the same time of the mounting of the covers on the conveyor. The covers are supplied with punching for the door assembly.